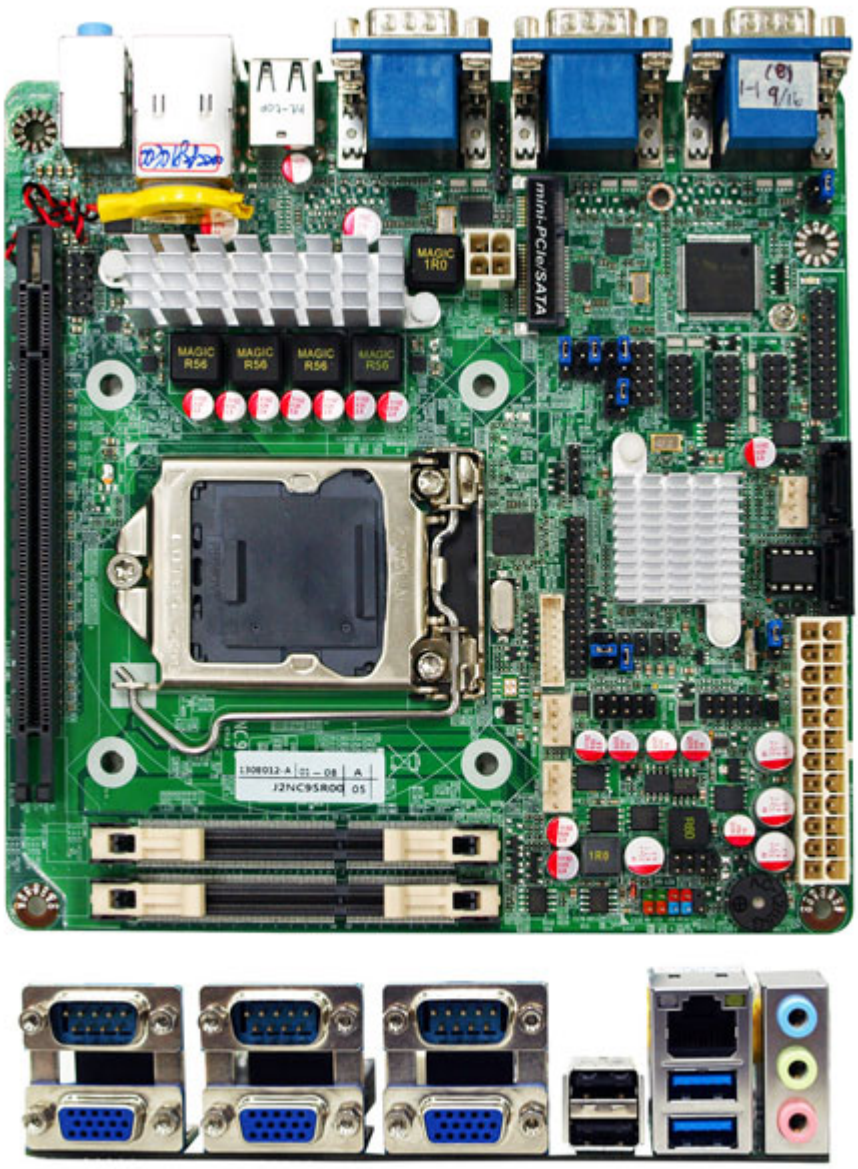

999.00 EUR
incl. 19% VAT, plus shipping

- INTEL® LGA 1150 Processor + B85 Chipset
- Support 2 * DDR3 1600/1333MHz Dual CH up to 16GB
- Support DirectX 9 Graphics
- Support 2 * Serial ATAIII (6Gb/s) Devices
- Integrated Realtek ALC662 HD Audio CODEC with 6-CH
- 1 * 24 bits Dual Channel LVDS header
- Supports 1 * Intel i217LM Gigabit LAN
- Support 6 * COM ports (COM1 support RS232/422/485)
- Support Windows 8
- Support Watch dog Technology
- Provides AT mode power
- Support CPU Smart FAN
- Compliance with ErP standard
- Mini-ITX Form Factor (170mm x 170mm)

CPU	INTEL® LGA1150
Chipset	INTEL® B85 chipset
Memory	2 * DDR3 1600/1333MHz Dual CH SO-DIMM up to 16GB
Expansion Slots	1 * PCI –E x 16 slot

Storage	2 * Serial ATA3 6Gb/s connectors 1 * mSATA full size slot (Share W/Mini PCI-E slot)
Audio	Realtek ALC662 6-Channel HD Audio
Ethernet LAN	1 * INI217LM PCI-E Gigabit LAN
LVDS	Onboard 1 * 24-bits Dual channel connector
USB	Embedded 6 * USB 2.0/1.1 / 2* USB 3.0
Special Features	Support ACPI S3 Support CPU Smart FAN Support Watch Dog
Rear Panel I/O	2 * USB 2.0/1.1 ports 2 * USB 3.0 ports 1 * RJ-45 port 3 * Audio I/O ports (Line-in, MIC and Line-out) 3 * VGA ports 3 * COM ports (COM1 for RS232/422/485)
Internal I/O	2 * USB 2.0/1.1 headers for 4 USB 2.0 ports 3 * COM ports header 2 * NB / Chassis Fan connectors 1 * LVDS headers /1 * Inverter headers 1 * AUDIO header 1 * HDMI-SPDIF header 1 * PS/2 header 1 * TPM header 1 * GPIO header 1 * AT mode selectable header 1 * Chassis Intrusion
BIOS	AMI 64MB UEFI DIP Flash ROM
Functional	POS Machine
Packing	Color Box Dimension■200(W) x 200(D) x 70(H)mm
Certificate	CE, FCC, RoHS
Temperature	Operating within 0~40 centigrade Storage within -20-85 centigrade
Form Factor	Mini ITX Form Factor(17cmx17cm)